

MODEL T46/T46A

SOFT SERVE FREEZER

TWIN TWIST, COUNTERTOP, DIGITAL CONTROLS

A: AIR PUMP VERSION AVAILABLE



Ideal for any **extremely high capacity outlets** to serve soft ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.



FREEZE DOWN

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption



DIGITAL CONTROL AND DISPLAY

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.



LOW MIX INDICATOR

Light turns "ON" at low mix to alert operator to add mix



SELF CLOSING DISPENSING VALVE

Automatically prevents product overflow after dispense



DISPENSE SPEED CONTROL

Provides flexibility in dispense rate control for different applications



HOPPER AGITATORS

Maintain product consistency and prevent product separation



AUTO PROGRAMMING

Allows automatic switching of operation modes based on preset schedules



STANDBY

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



SAFETY PROTECTIONS


- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating

POWERFUL AND VERSATILE TWIN TWIST EXTREMELY HIGH CAPACITY COUNTERTOP MODEL FOR ICE CREAM, FROZEN YOGURT, SORBET AND MUCH MORE

MAXIMISE YOUR PROFITS

MODEL T46/T46A

SOFT SERVE FREEZER MACHINE

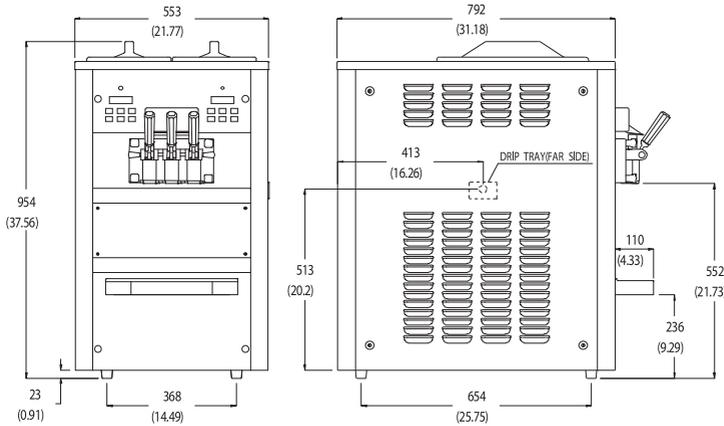

ISO 9001 REGISTERED

SPECIFICATIONS

Flavours	2 + Twist	
Freezing Cylinders	2 x 1.7L	
Mix Hoppers	2 x 12L /A: 10L	
Output Capacity (80 grams)	550 serves/hr	
Clearance Requirements	152mm/6" on back	

WEIGHT	KG/LB (Gravity)	KG/LB (Pump)
Net	195 / 433	205 / 456
Shipping	212 / 471	222 / 493
Volume	0.62 CBM / 2 1.76 CBF	

DIMENSIONS	NET (MM/IN)	SHIPPING (MM/IN)
Width	552 / 21.7	620 / 24.4
Depth	772 / 30.4	930 / 36.6
Height	935 / 36.8	1070 / 42.1

ELECTRICAL	AMP	VOLT	POWER(KW)
Single Phase	16	NA	NA
Single Phase	16	NA	NA

FEATURES

CONTROL SYSTEMS	TWO, DIGITAL
REFRIGERATED HOPPERS	<input checked="" type="checkbox"/>
HOPPER AGITATOR OPTIONAL	<input checked="" type="checkbox"/>
TEMPERATURE DISPLAY	<input checked="" type="checkbox"/>
STANDBY MODE	<input checked="" type="checkbox"/>
AUTO CLOSING DISPENSING VALVES	<input checked="" type="checkbox"/>
DISPENSING SPEED CONTROL	<input checked="" type="checkbox"/>
LOW MIX INDICATOR LIGHT	<input checked="" type="checkbox"/>
LOW MIX INDICATOR ALARM	<input checked="" type="checkbox"/>
LOW TEMPERATURE PROTECTION	<input checked="" type="checkbox"/>
MOTOR AMPERAGE PROTECTION	<input checked="" type="checkbox"/>
HIGH PRESSURE PROTECTION	<input checked="" type="checkbox"/>
THERMAL OVERLOAD PROTECTION	<input checked="" type="checkbox"/>

BLUE ICE MACHINES LTD

Lea Road trading Estate, Lea Rd, Waltham Cross, London, Waltham Abbey EN9 1AE

020 8801 6919

info@blueicecreammachine.co.uk

www.blueicecreammachine.co.uk